

# Grating Selection Guide




## Molded and Pultruded Grating


	Fibergrate® Molded Grating		Safe-T-Span® Pultruded Grating
	1" Rectangular Mesh	1", 1-1/2", 2" Square Mesh	
Corrosion Resistance	HR	HR	R
Strength/Stiffness (longest span)	R	R	HR
Impact Resistance	R	HR	A
Open Area (for drainage, aeration, light penetration)	HR	HR	A
Single-Direction Span	R	A	HR
Bidirectional Span	NR	HR	NR
Ease of Layout and Installation	A	HR	A
Lightweight in Comparison to Metals	HR	HR	HR
Custom Panel Sizes Available	A	R	R

**HR** = Highly Recommended      **R** = Recommended      **A** = Acceptable      **NR** = Not Recommended

*These are general comparisons. A Fibergrate representative should be consulted for an exact match of grating and application.*

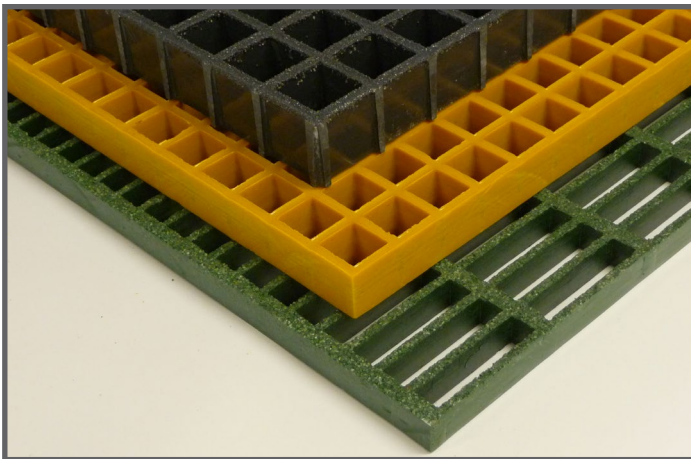

Molded Grating

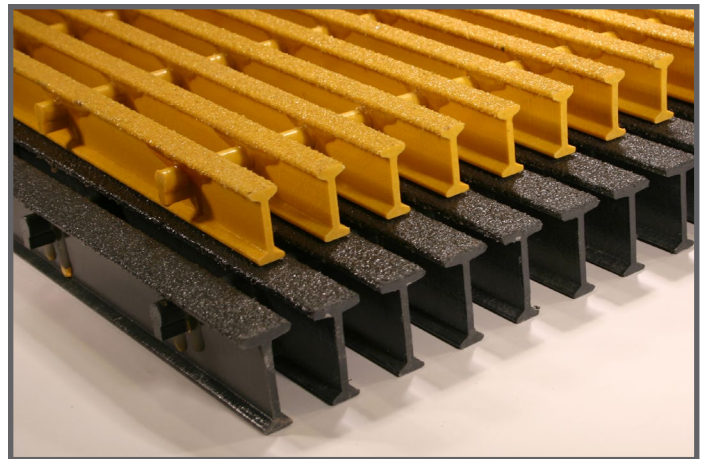

Pultruded Grating

Phone: 972-250-1633  
Fax: 972-250-1530

[www.fibergrate.com](http://www.fibergrate.com)

[info@fibergrate.com](mailto:info@fibergrate.com)

Fibergrate Composite Structures Inc. believes the information contained here to be true and accurate. Fibergrate makes no warranty, expressed or implied based on this literature and assumes no responsibility for consequential or incidental damages in the use of these products and systems described, including any warranty of merchantability or fitness. Information contained here is for evaluation only.  
©Fibergrate Inc. 2015-05/15-GratingSelectionGuide.pdf

